

ONYX® 3" DC / IC Target | Standard Magnetics

Metric Specifications

Construction


Anode	304 Stainless Steel
Cathode Body	OFHC Copper
Insulator	CTFE

Cooling Requirements

Flow Rate at Maximum Power	0.07 LPS
Maximum Input Pressure, Open Drain	4 BAR
Maximum Input Temperature	20 °C

Dimensions

A	117.9 mm
B	119.2 mm
C	25.4 mm

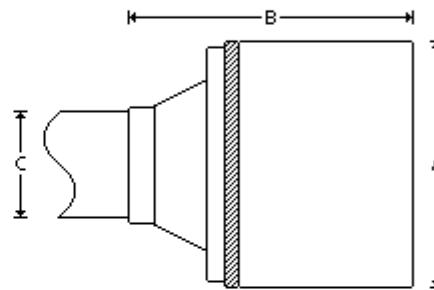

General

Magnetic Enhancement	Permanent (NdFeB) Encapsulated
Maximum Temperature	100 °C
Source to Substrate Distance	50.8 mm - 304.8 mm
Weight, Approximate Without Options	4.6 kg

Maximum Sputtering Power *

Cathode Voltage	100 - 1500 Volts
Direct Cooled Mode, DC	2 kW
Direct Cooled Mode, RF	1 kW
Discharge Current	0.1 - 4 Amps
Indirect Cooled Mode, DC	1.5 kW
Indirect Cooled Mode, RF	700 Watts
Operating Pressure	0.5 - 50 mTorr

Mounting, Standard

Power Cable, DC	RG393
Power Cable, RF	1675A
Power Connector, DC	Type N Connector, External Threads
Power Connector, RF	Type HN Connector, External Threads
Stem, Outer Dimension Tubing	25.4 mm
Water, Outer Dimension Tubing	9.6 mm

Target

Cooling	Direct / Indirect
Diameter	76.2 mm / 105.0 mm
Form	Circular / Planar
Thickness	6.4 mm / 11.4 mm

Specifications Disclaimer

- All Angstrom Sciences NdFeB magnets are totally encapsulated and protected from degradation by water.
 - All sources are available in external configurations.
 - * Maximum power for cathode only, a target material's properties, such as, thermal and electrical conductivity may limit the maximum process power level.
 - Some custom-engineered and specialty magnetrons may not meet standard specifications.
 - Specifications are subject to change without notice.
 - Typical performance. Results may vary with process parameters such as pressure, flow rate, target material, and substrate rotation, etc.
-

Please contact us for specifications regarding your application.

Angstrom Sciences | Call +1-412-469-8466 | www.angstromsciences.com